

Rittal – The System.

Faster – better – everywhere.

NH fuse-switch- disconnectors, size 00 to 3 with electronic fuse monitoring – SV 9343.030

Date : Aug 21, 2022

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



NH fuse-switch-disconnectors, size 00 to 3 with electronic fuse monitoring – SV 9343.030

created: 21.08.2022 on www.rittal.com/com-en

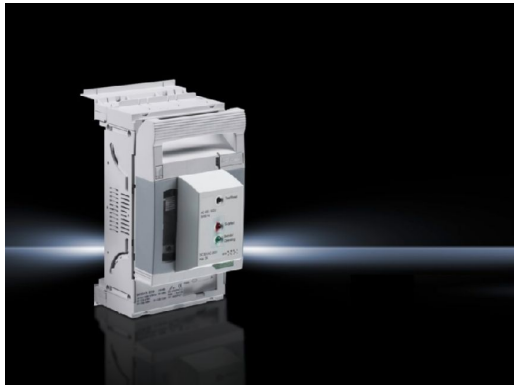

Product description	
Material:	Polyamide Fire protection corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Colour:	Chassis: RAL 7035 Cover: RAL 7035/7001
Basis of test:	IEC/DIN EN 60 947-3 DIN EN 60 269-2 (fuse inserts)
Product description	
Design:	Size: 00
To fit busbars:	with cross-section height: 5 mm with cross-section height: 10 mm
Number of poles:	3-pole
For bar systems with centre-to-centre spacing:	60 mm
Dimensions:	Width: 106 mm Height: 194 mm
Type of electrical connection:	Screw M8
Rated operating	400 V - 690 V, 3~

voltage:	
Clamping area for laminated copper bars:	Width: 20 mm Height: 5 mm
Connection for round conductor cross-sections:	10 mm ² - 95 mm ²
Rated operating current max.:	160 A
Cable outlet:	Top/bottom
Packs of:	1 pc(s).
Weight/pack:	1.03 kg
Copper weight (kg per piece):	0.2
EAN:	4028177540293
Customs tariff number:	85369095
ETIM 7.0:	EC001040
ETIM 6.0:	EC001040
eCl@ss 8.0/8.1:	27371401
eCl@ss 6.0/6.1:	27371401
Product description:	SV NH fuse-switch disconnecter, size 00, 160 A, 400-690 V, 3-pole, screw M8, with electronic fuse monitoring
Approvals	
Approvals:	CCC
Certificates:	EAC
Declarations:	Declaration of conformity